

POLYETHYLENE ENCASEMENT PRODUCTS


# 4 Mil Cross Laminated High Density Polyethylene

In 1993 Virgin Cross-Laminated High-Density Polyethylene film was included in ANSI/AWWA C105/A21.5

VALERON® Strength Films is the trade name for the toughest polyethylene encasement film ever introduced for the protection of buried pipe systems. SIGMA Corporation distributes Valeron® to the Water Works industry

VALERON, a tough, high-performance polyolefin film that is one of the strongest available anywhere. This lightweight film is your best solution for applications requiring high strength, tear and puncture resistance, easy handling, printability.

VALERON film is a “cross-laminate” of two oriented polyolefin films. A patented process gives the film physical and mechanical characteristics that surpass those of traditional flexible materials

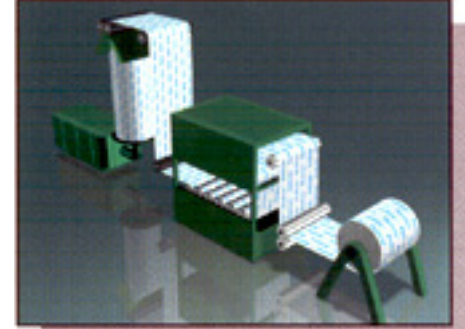

## Specifications

Physical Attribute	Test Direction	ANSI/AWWA C105/A21.5 MINIMUM REQUIREMENT	SIGMA TYPICAL TEST VALUES
TENSILE STRENGTH ASTM D882	MACHINE DIRECTION	6300psi	8057psi
	TRANSVERSE DIRECTION	6300psi	8516psi
ELONGATION ASTM D882	MACHINE DIRECTION	100%	328%
	TRANSVERSE DIRECTION	100%	269%
DIELECTRIC STRENGTH ASTM D149 (VOLTS / MIL)	n/a	800 volts / mil	2828 volts / mil
IMPACT RESISTANCE ASTM D1709 (grams)	n/a	800 grams	1546 grams
PROPAGATION TEAR RESISTANCE ASTM D1922 (gf)	MACHINE DIRECTION	250 grams/force	471 grams/force
	TRANSVERSE DIRECTION	250 grams/force	725 grams/force

## Manufacturing Process

The extrusion process starts with a low blowup ratio of high quality blended resins. The extruded tube of film is stretched in the machine direction to align the molecules, making the film extremely strong in one direction.

The stretched blown film tube is loaded onto VALERON's unique spiral cutter. As the film tube moves forward, it is rotated and cut in a continuous spiral. This produces a single sheet of flat, bias-cut film with the strong molecular orientation now running in a 45° angle to the roll.

Two bias-cut films are laminated together with their directions of strength at right angles to one another. This produces one sheet of high strength, puncture and tear resistant VALERON film.



# 4 Mil Cross Laminated High Density Polyethylene

## AWWA Specifications

ANSI/AWWA C105/A21.5 DEFINES CROSS-LAMINATED HIGH-DENSITY POLYETHYLENE FILM AS :”Film extruded from virgin high-density polyethylene raw material, which is then molecularly oriented by stretching. Two single-ply layers of the film are then laminated together with their orientations at 90 degrees to one another to form the final product.”

4 mil Stock Tube Sizes (BASED ON ANSI/AWWA C105/A21.5 Table 1 )		
Item No.	DI PIPE SIZE	LAYFLAT TUBE SIZE
47-CL20	4-8"	20" X 500 FT.
47-CL27	10-12"	27" X 500 FT.
47-CL30	14"	30" X 500 FT.
47-CL34	16"	34" X 500 FT.
47-CL41	18-20"	41" X 500 FT.
47-CL54	24"	54" X 500 FT.
47-CL67	30"	67" X 500 FT.
47-CL81	36-42"	81" X 500 FT.
47-CL95	48"	95" X 500 FT.
47-CL108	54-60"	108" X 500 FT.

Custom CL-HDPE Products	
For product not shown in our standard ANSI/AWWA C105/A21.5 Stock tube sizes we can provide film designed to meet your most demanding requirements .	
Specialty Polyethylene Products Specifiaction/ Ordering Guidelines	
THICKNESS	up to 6.5 Mils.
TUBE SIZE	Based on Manageable Weight
Colors	White(std.) - Black is Available
Minimum Order Qty.	Based on Requirements
Lead Time	Approximately 12 Weeks

## Advantages of VALERON 4 Mil Cross Laminated HDPE

- Tear Resistant
- Puncture Resistant
- High Burst Strength
- Temperature Range: -70 to +200 F
- Moisture Resistant
- Chemical Resistant
- Excellent Printability

## Contact SIGMA For More Information or to Place an Order

### North Region

**Cream Ridge, New Jersey (HQ)**  
 Phone (800) 999-2550  
 Fax (609) 758-1158  
 crm-sales@sigmaco.com

**Sauk Village, Illinois**  
 Phone (888) 999-0420  
 Fax (708) 758-6790  
 chi-sales@sigmaco.com

### South Region

**Alexander City, Alabama**  
 Phone (800) 824-4513  
 Fax (256) 234-4956  
 rps-sales@sigmaco.com

**Houston, Texas**  
 Phone (800) 999-0109  
 Fax (281) 987-0200  
 htn-sales@sigmaco.com

### West Region & Canada

**Ontario, California**  
 Phone (800) 688-6230  
 Fax (909) 391-2033  
 ont-sales@sigmaco.com

**Auburn, Washington**  
 Phone (800) 688- 6230  
 Fax (909) 391-2033  
 ont-sales@sigmaco.com

**Innisfil, Ontario, Canada**  
 Phone (877) 436-3800  
 Fax (705) 436-6338  
 crm-sales@sigmaco.com

**Victoriaville, Quebec, Canada**  
 Phone (888) 744-6262  
 Fax (819) 758-1153  
 crm-sales@sigmaco.com