



SIGMA **ONE**-LOK SERIES SLO

ONE Restraint For Various Types of Pipe

Ductile Iron, C900, Steel, IPS, HDPE, and C909 Pipe

Features and Applications:

- Available in 3” thru 12”
- Made of Ductile Iron
- Interlocking Bolt and Wedge for superior grip
- Contoured wedge eliminates point loading
- No special tools required
- “Cam Action” wedges can rock, increasing grip as thrust increases
- Provides resistance to settling, seismic forces and other movement
- Allows for deflections during installation
- Recommended on Ductile Iron, PVC - C900, IPS, Steel, C909 & HDPE pipe (**ONE** restraint for various type of pipes)

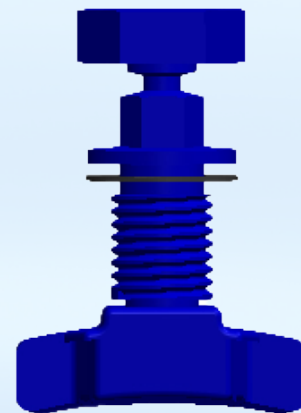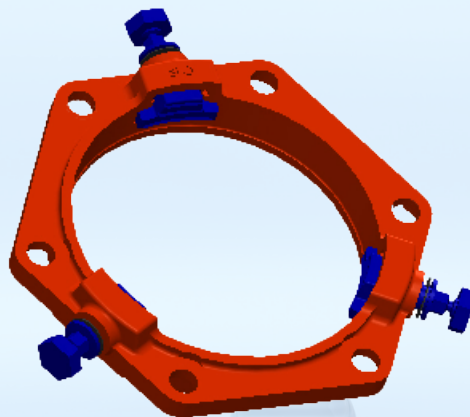

Nominal Pipe Size	Part Number	Weight (lbs)	Allowable Joint Deflection	Pressure Rating
*3	SLO3	5.0	5°	350 PSI
4	SLO4	6.5	5°	350 PSI
6	SLO6	10.5	5°	350 PSI
8	SLO8	14.5	5°	350 PSI
10	SLO10	20.0	5°	350 PSI
12	SLO12	25.0	5°	350 PSI

- SLO is UL Listed & FM approved on DI, PVC, and Steel pipe
- Refer to the product information on our website for specific pressure ratings based on application
- *3” SLO is not currently stocked but is offered



Contact Your Territory Sales Manager