


PV-LOK™ MODEL PVPF SERRATED RESTRAINT FOR IPS OD PVC PIPE AND PVC FITTING

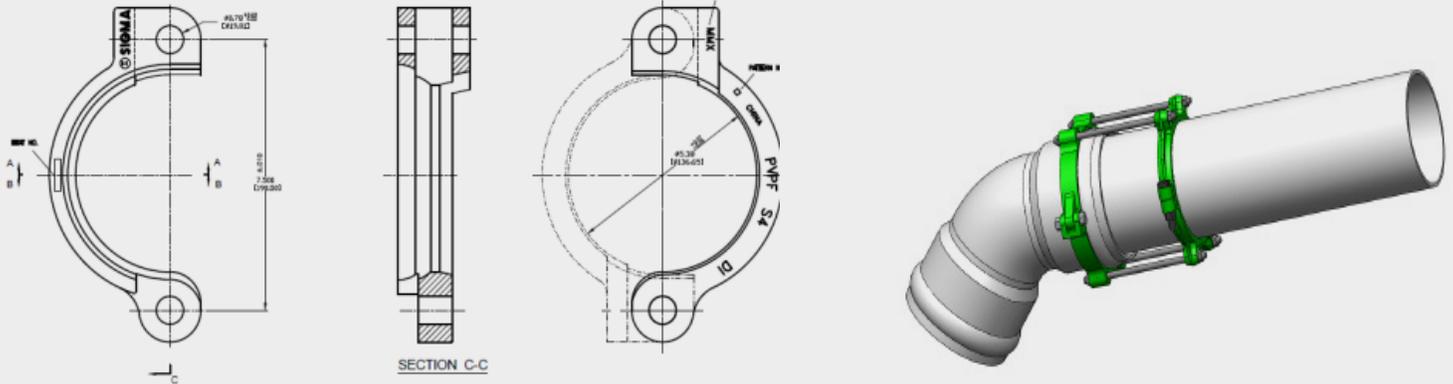

PRODUCT SPECIFICATIONS

- MATERIAL:**
- Machine-serrated clamping ring and non-serrated, beveled back-up ring are manufactured of high strength ductile iron in accordance with ASTM A536, Grade 65-45-12.
 - Side clamping bolts and hex nuts are manufactured of high strength steel in accordance with ASTM A449 and zinc-plated to B663, Type III Sec.1 for corrosion resistance.
- SIZE RANGE:**
- 2", 3", 4", 6", and 8"
- DIMENSION:**
- Conform to ASTM D2241 PVC pipe and fittings
- PRESSURE RATINGS:**
- Equal to the water working pressure rating of the pipe upon which it is installed with a minimum 2:1 factor of safety.
- COATING:**
- Green Alkyd Paint, Special Coatings - E-Coat available
- DEFLECTION:**
- Maintains the allowable nominal deflection within the PVC pipe manufacturer's recommendation for ASTM D2241 PVC pipe to PVC fitting bell.
- TRACEABILITY:**
- Machine-serrated clamping ring and non-serrated, beveled back-up ring are individually cast with exact heat code information.
- INSTALLATION:**
- In accordance with manufacturer's recommendation and applicable ASTM D2241 PVC pipe standards.
- HARDWARE:**
- Standard hardware conforming to AWWA C111/A21.11, SS304 and 316 available.

Note: This product is not designed to be used on plain end fittings.