



Dielectric Unions

Sizes 1/2" - 2"

Dielectric Union series feature a Female Iron Pipe Thread to Solder Connection. These Unions are designed to be installed between pipe made from dissimilar metals to prevent accelerated corrosion and deterioration in the pipe system due to galvanic and stray current. This Dielectric Union series is certified to UPC standards and The No Lead Plumbing Law.

Specifications

- *Steel Nut & IPS Connection meets UNS G10180
- * Steel Nut (Galvanized)
- *Threaded end complies with ANSI B1.20.1
- *Solder Brass Connection meets ASTM C37700
- *Solder end complies with ANSI B16.22
- *Insulator insert made from PSU 3010
- *EPDM Gasket for standard temperature applications: (180°F @ 250 psi)

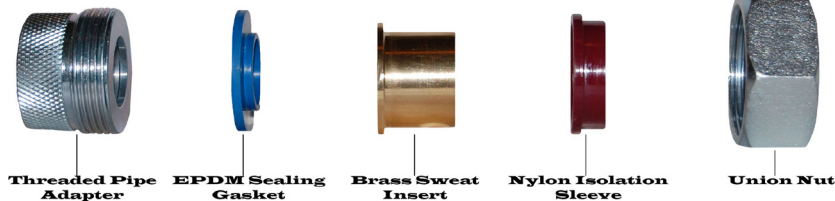

PART #	SIZE	A		B		WEIGHT	
		in	mm	in	mm	oz.	gm.
1MUNSD04G	1/2"	1.66	42.2	1.62	41.2	5.1	145
1MUNSD05G	3/4"	1.94	49.3	1.85	47.0	6.4	182
1MUNSD0504G	3/4" x 1/2"	1.69	43.0	1.85	47.0	6.4	181
1MUNSD06G	1"	2.28	58.0	2.12	53.9	8.5	240
1MUNSD07G	1-1/4"	2.42	61.5	2.58	65.5	12.9	365
1MUNSD08G	1-1/2"	2.61	66.3	2.94	74.7	20.7	588
1MUNSD09G	2"	2.99	76.0	3.79	96.3	38.3	1086

